


Soda Factory™ Remote Refrigeration Units
44G • 50G

Soda Factory™ Remote Refrigeration Units

44G • 50G

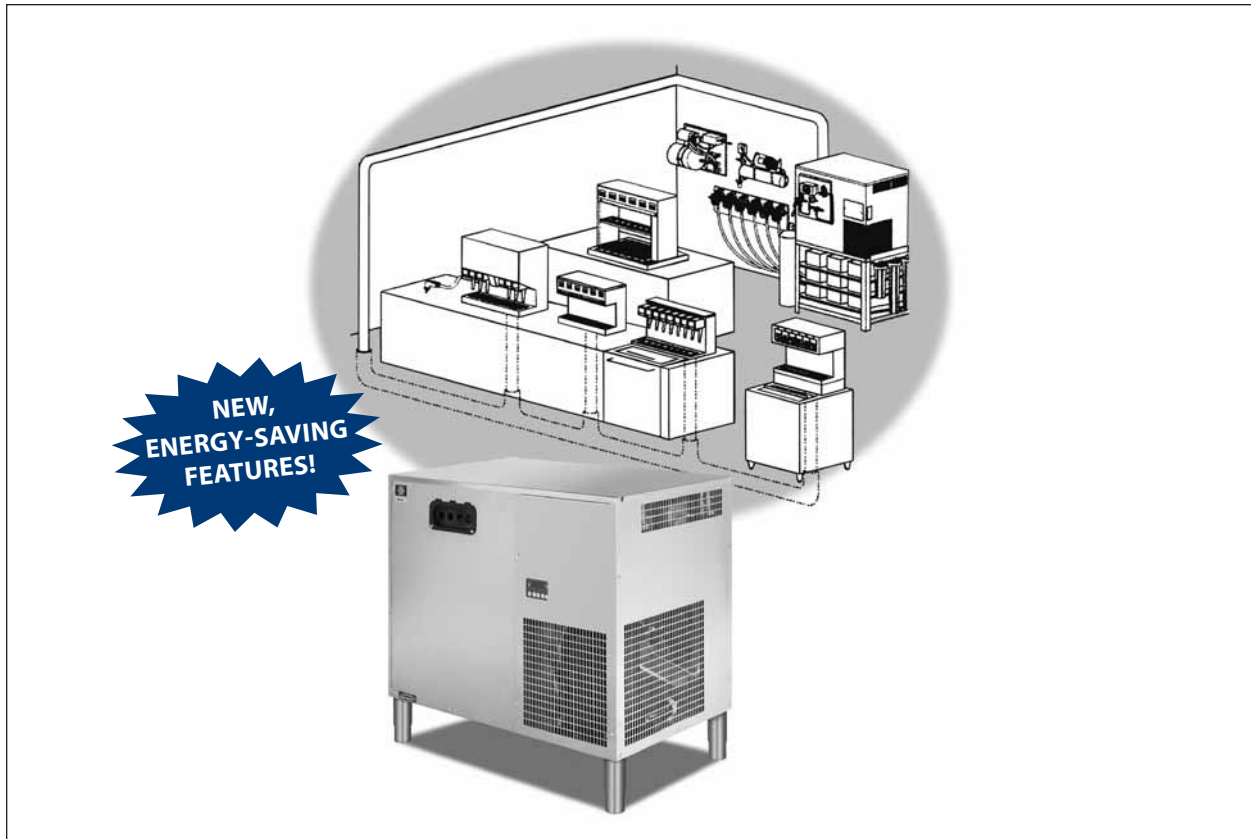

The Soda Factory™ provides the most consistent, high-quality beverages in the industry.

Standard Features

- Uses up to 30% less energy than previous models.
- New, magnetic-drive circulation pump improves reliability by eliminating pump seal.
- All water used for cooling drinks is recycled with virtually no waste water; reduces water and sewage expenses.
- Durable, easy-to-clean stainless steel cabinet.



US LISTED



ISO 9001:2000
Quality System Certified

2100 Future Drive
Sellersburg, IN 47172 USA


Tel: 812.246.7000
Fax: 812.246.7024

www.manitowocbeverage.com/us




Specifications

	Model 44G		Model 50G	
Standard Features	Internal cold carbonation, magnetic-drive circulation pump, stainless steel cabinet			
Electrical	Volts	208-230	208-230	208-230 / 208-230/400
	Hz	60	50	60 / 50
	Phase	1	1	3 / 3
	Minimum Circuit Amps	21	20	26 / 15
	Maximum Breaker Size	30	30	30 / 20
Compressor	1.0 hp / 1.6 kW		2.2 hp / 2.2 kW	
Ice Bank Size (Nominal)	140 lbs / 63.3 kgs		200 lbs / 90.5 kgs	
Evaporator Rating (20°F / -6.5°C)	9,700 BTUH / 2,444 kcal/hr		14,900 BTUH / 5,143 kcal/hr	
Heat Rejection (Maximum)	13,576 BTUH / 3,421 kcal/hr		20,408 BTUH / 5,143 kcal/hr	
Condenser Types	Air-cooled, water-cooled or remote			
Drink Capacity per hour @ 75°F (24°C) Peak (max for 2 hr period) / Sustained	500 / 288		600 / 420	
Maximum Conduit Length	250 ft / 76 m		350 ft / 107 m	
Syrup Coils (Standard/Maximum)	8 / 12		8 / 14	
Shipping Weight (Approximate)	340 lbs / 154 kgs		395 lbs / 179 kgs	
Options	Legs, stand, additional syrup coils, casters			

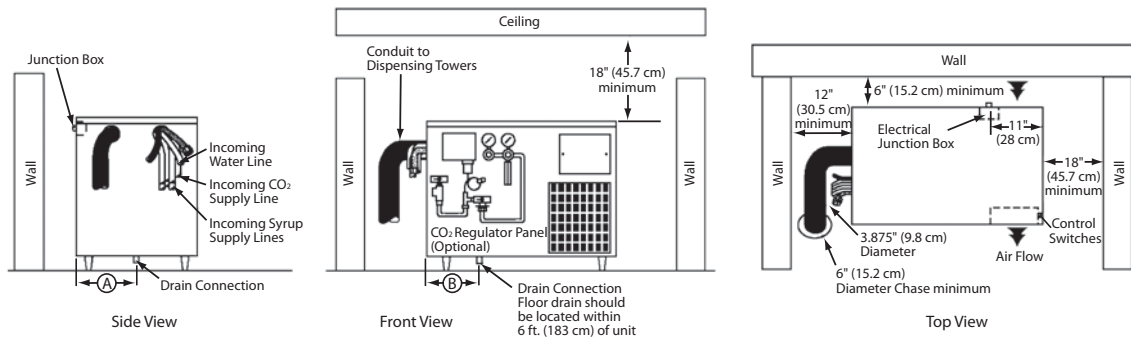

Dimensions

Unit	Width	Depth	Height	Leg Height	Drain Connection A	Drain Connection B
Model 44G	39.75"	24.75"	30.25"	6"	12"	6"
	101 cm	62.9 cm	76.83 cm	15.2 cm	30.5 cm	15.2 cm
Model 50G	42.25"	28.25"	32.00"	6"	14"	8.5"
	107.3 cm	71.8 cm	81.3 cm	15.2 cm	35.6 cm	21.6 cm



McDonald's® is a registered trademark of McDonald's Corporation.